

## PRODUCT DATA SHEET

# Sikaflex®-276 PC-2

Warm-applied direct-glazing adhesive with instant tack and acceleration option

**TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)**

Chemical base	Polyurethane
Color (CQP001-1)	Black
Cure mechanism	Moisture curing
Density (uncured)	1.21 kg/l
Non-sag properties (CQP061-1)	Excellent
Application temperature	60 °C
Skin time (CQP019-1)	40 minutes <sup>A</sup>
Open time (CQP526-1)	10 minutes <sup>A</sup>
Curing speed (CQP049-1)	(see diagram)
Shrinkage (CQP014-1)	1 %
Shore A hardness (CQP023-1 / ISO 48-4)	60
Tensile strength (CQP036-1 / ISO 527)	8 MPa
Elongation at break (CQP036-1 / ISO 527)	500 %
Tear propagation resistance (CQP045-1 / ISO 34)	14 N/mm
Tensile lap-shear strength (CQP046-1 / ISO 4587)	6 MPa
Service temperature (CQP509-1 / CQP513-1)	-40 – 90 °C
Shelf life	unipack drum / pail
	9 months <sup>B</sup> 6 months <sup>B</sup>

CQP = Corporate Quality Procedure

<sup>A</sup>) 23 °C / 50 % r.h.<sup>B</sup>) Storage below 25 °C
**DESCRIPTION**

Sikaflex®-276 PC-2 is a warm-applied, 1-component polyurethane direct-glazing adhesive with high initial grip to prevent glass slip-down. Suited for bonding materials relevant for direct glazing such as glass, ceramic frits, painted and e-coated surfaces in commercial-vehicle production.

Sikaflex®-276 PC-2 can be accelerated with Sika's Booster system.

**PRODUCT BENEFITS**

- Excellent standing and slip-down behavior
- Very short cut-off string
- Good workability
- Suitable for manual and automated application
- Solvent-free

**AREAS OF APPLICATION**

Sikaflex®-276 PC-2 is designed for direct-glazing applications in the transportation industry, especially where a high initial grip with short fixation times is required. The product is suitable for both manual and automatic applications.

Seek manufacturer's advice and perform tests on original substrates before using Sikaflex®-276 PC-2 on materials prone to stress cracking.

Sikaflex®-276 PC-2 is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed ensuring adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikaflex®-276 PC-2

Version 03.01 (04 - 2023), en\_IN

012001212760001010

## CURE MECHANISM

Sikaflex®-276 PC-2 cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

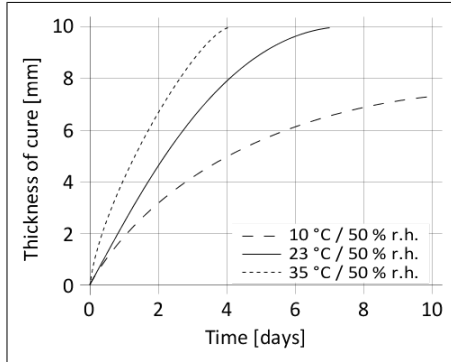


Diagram: curing speed Sikaflex®-276 PC-2

## CHEMICAL RESISTANCE

Sikaflex®-276 PC-2 is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface preparation

Surfaces must be clean, dry and free from grease, oil, dust and contaminants.

Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Suggestions for surface preparation may be found on the current edition of the appropriate Sika® Pre-treatment Chart. Consider that these suggestions are based on experience and have in any case to be verified by tests on original substrates.

### Application

Sikaflex®-276 PC-2 must be processed at 60 °C, at an ambient temperature between 10 °C and 35 °C (changes in reactivity and application properties have to be considered). The optimum temperature for the substrates is between 15 °C and 25 °C.

Unipacks need to be heated prior the application - this usually takes 60 minutes in a dedicated oven set at 60 °C. Unipacks can be reheated from cold several times, but must not be kept at 60 °C for more than 10 hours in total.

To ensure a uniform thickness of the bondline it is recommend to apply the adhesive in form of a triangular bead (see figure 1).

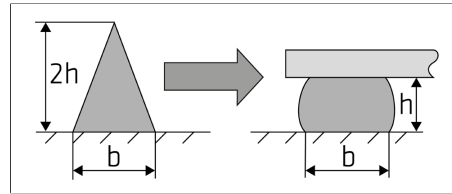


Figure 1: Recommended bead configuration

Sikaflex®-276 PC-2 can be processed a pneumatic or electric driven piston guns as well as pump equipment.

The open time is significantly shorter in hot and humid climate. The glass must always be installed within the open time. Never install a glass after the adhesive has built a skin.

For advice on selecting and setting up a suitable pump system, contact the System Engineering Department of Sika Industry.

## Removal

Uncured Sikaflex®-276 PC-2 may be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin have to be washed immediately using hand wipes such as Sika® Cleaner-350H cleaning towels or a suitable industrial hand cleaner and water.

Do not use solvents on skin.

## FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- Sika Pre-treatment Chart
  - For 1-component Polyurethanes
- General Guideline
  - Bonding and Sealing with 1-component Sikaflex®

## PACKAGING INFORMATION

Unipack	600 ml
Pail	23 l
Drum	195 l

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

## DISCLAIMER

The information, and in particular, the recommendations relating to the application and enduse of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

## PRODUCT DATA SHEET

Sikaflex®-276 PC-2  
Version 03.01 (04 - 2023), en\_IN  
012001212760001010

Sika India Pvt. Ltd.  
620, Diamond Harbour Road  
Commercial Complex II  
Kolkata - 700 034  
West Bengal, India  
Phone: +91 33 2447 2448  
info.india@in.sika.com

