



Sikafloor®-100 Level (H)

Polymer modified Fast Hardening Cementitious Self levelling underlayment compound

Applications

Sikafloor®-100 Level (H) can be applied manually or by pump to level floors at a thickness between 2-10 mm, on new or existing substrates over Sikafloor®-10 Primer surface for the levelling and smoothing of interior floors prior to the application of the final floor finish. Sikafloor®-100 Level (H) is for interior use only. Typical uses are in commercial, residential and areas with foot traffic. Providing a suitable substrate for ceramic, stone or vitrified clay tiles, carpets, linoleum, PVC sheet etc.

Application Information

Primer consumption: 0.15-0.3kg/m²

Under layer Consumption: Approx 1.6kg/m²/mm

Pot Life: Approx. 30 min. at +20 °C

Waiting Time / Overcoating:

Sikafloor®-100 Level can be over coated as follow:


- Up to 3 mm after approx. 24 hours for all kind of coverings
- Up to 5 mm after approx. 48 hours for all kind of coverings

All values are approximate and are subject to climatic fluctuations. Values given with 20°C and 65 % rel. humidity, temperature of substrate +15 °C

Packaging: 25kgs

Application note

Do not apply on substrates with rising moisture. If rising moisture can occur, an effective damp proof membrane must be applied and be in compliance with the relevant national standard.

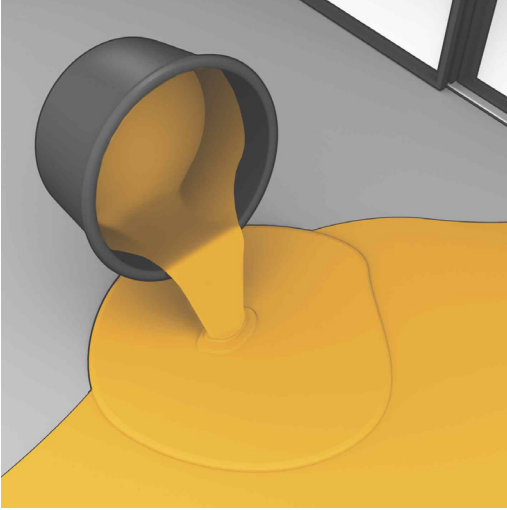

Sika India Pvt. Ltd.

501 & 502, B Wing,
Lotus Corporate Park,
Off. Western Express Highway,
Goregaon East, Mumbai - 400063

Tel: +91 22 6270 4038
Fax: +91 22 6270 4039
Email: info.india@in.sika.com
Website: ind.sika.com

BUILDING TRUST

