BUILDING TRUST

PRODUCT DATA SHEET

Sarnafil® U Bar

Fastening Profile for S-U Bar System and Perimeter Fastening


DESCRIPTION

Folded galvanized steel fastening profile for the mechanical fastening of roof waterproofing membranes.

USES

For the mechanical fastening of roof waterproofing membranes to roofing structures and perimeter fastening in combination with Sarnafast® fasteners.

CHARACTERISTICS / ADVANTAGES

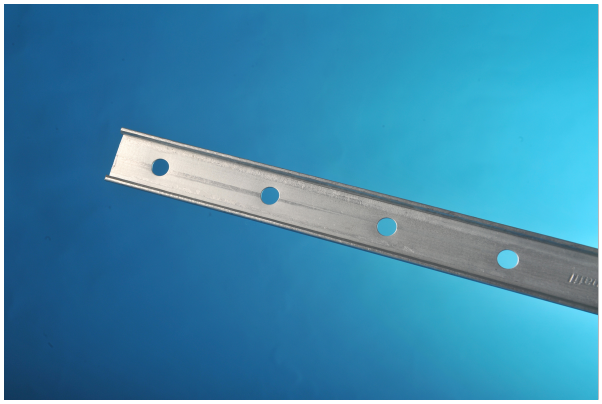

PRODUCT INFORMATION

Chemical base	Hot-dip coated carbon steel	
Packaging	Refer to current price list for packaging variations.	
Appearance / Colour	Surface	Smooth
	Color	Silver grey
Shelf life	5 years from date of production.	
Storage conditions	The product must be stored in original, unopened and undamaged sealed packaging in dry conditions protected from direct sunlight, rain, frost and snow	
Length	2000 mm	
Width	25 mm	
Thickness	1.0 mm	
Height	6 mm	
Mass per length	0.3 kg/m	
Colour	Hole diameter	Φ 7.5 mm
	Hole distance	50 mm
	Sarnafast fastening distance recommended	every 200mm

APPLICATION INFORMATION

Ambient air temperature	- 20 °C min. / + 60 °C max.
Substrate temperature	- 30 °C min. / + 60 °C max.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

IMPORTANT CONSIDERATIONS

- Installation work must only be carried out by Sika® trained and approved contractors, experienced in this type of application.
- The use of Sarnafil® U Bar Fastening Profile is limited to geographical locations with average monthly minim- um temperatures of - 50 °C. Permanent ambient temperature during use is limited to + 50 °C.

ECOLOGY, HEALTH AND SAFETY

It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in the product data sheet. Based on our current knowledge, this product does not contain SVHC (substances of very high concern).

APPLICATION INSTRUCTIONS

APPLICATION

Sarnafil® U Bar Fastening Profile must be installed in accordance with Sika application manual and installations instructions.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product’s suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika India Pvt. Ltd.
620, Diamond Harbour Road
Commercial Complex II
Kolkata - 700 034
West Bengal, India

Contact:
Phone: +91 33 2447 2448
Fax: +91 33 2397 8688
info.india@in.sika.com
www.sika.in