

PRODUCT DATA SHEET

Sika® Anchor-300

Anchor fixation through sheet waterproofing membranes

DESCRIPTION

Sika® Anchor-300 is a hard PVC anchor shaft in grey colour combined with Sikaplan® PVC waterproofing membrane flange in yellow colour.

USES

Sika® Anchor-300 is used in double-shell tunnel constructions in combination with waterproofing sheet membranes on base of PVC-p to temporary fix the reinforcement of the inner lining to the outer shell, until the secondary concrete or shotcrete lining is cured and self-supporting.

CHARACTERISTICS / ADVANTAGES

- Allows watertight hot air welded seam with Sikaplan® WP membranes
- Good force transfer through hard PVC shaft
- Waterproofing line around anchor (no additional sealing elements required)
- Anchor steel corrosion-protected
- Quick and simple installation

APPROVALS / STANDARDS

Watertightness test (Vacuum testing):
-0.2 MPa by Sika Testing System TM 87

PRODUCT INFORMATION


Packaging

30 pcs per box

Appearance / Colour

PVC Membrane
PVC Shaft

yellow and black
grey

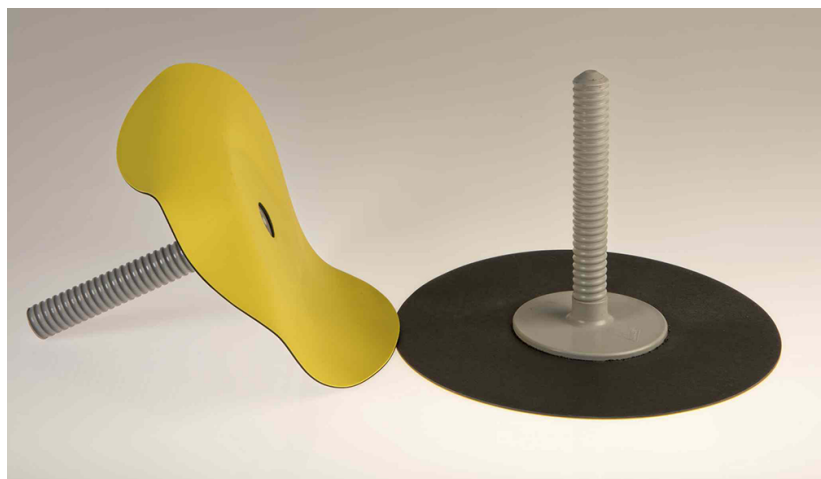

Shelf Life

5 years shelf life from date of production if stored properly in undamaged, unopened, original sealed packaging

Storage Conditions

Store in dry conditions, protected from direct sunlight, rain, snow and ice,

Product Data Sheet


Sika® Anchor-300

November 2020, Version 01.01

020720802000000014

etc.

Dimensions

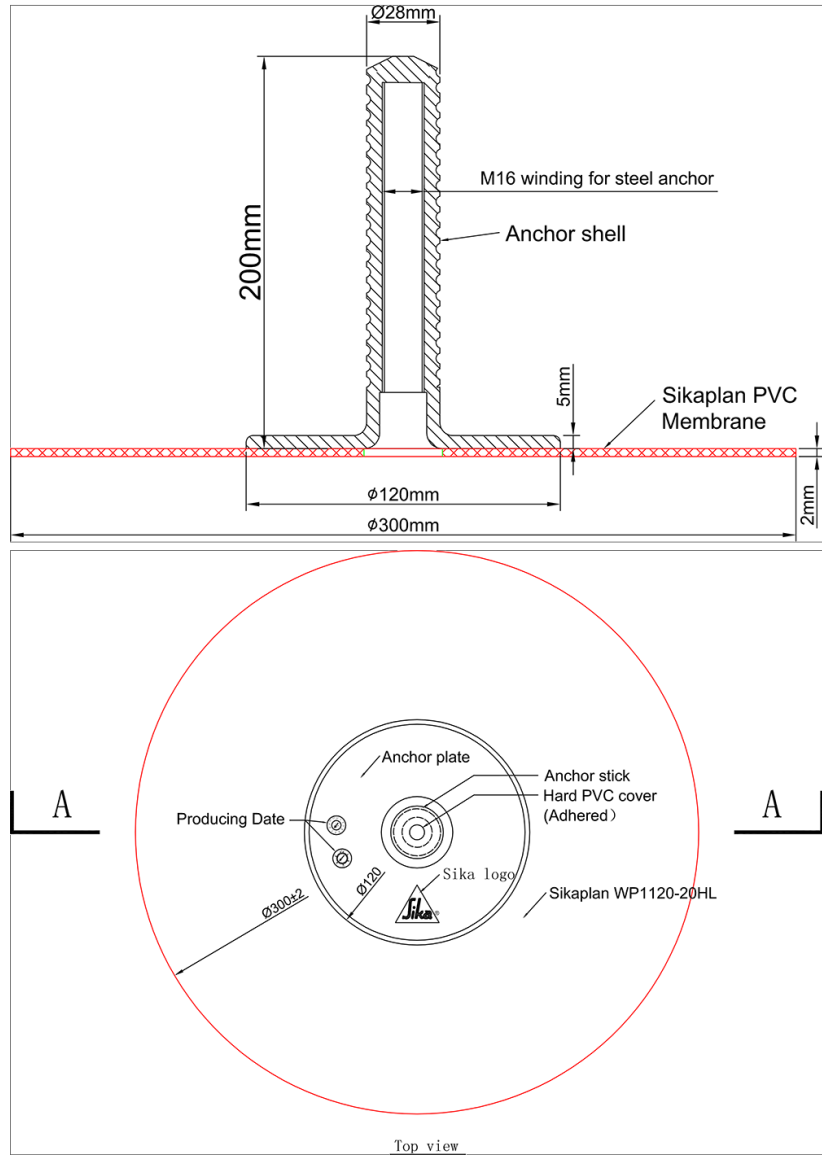

Diameter

Shaft: Inside Thread M16, length 200 mm
Membrane: 300 mm

Thickness

Membrane: 2.0 mm

TECHNICAL INFORMATION

Ambient Maximum Temperature of Liquids + 35 °C max

SYSTEM INFORMATION

System Structure

Ancillary products:

- Sikaplan® WP 1100 -types
- Sikaplan® WP 1110 -types
- Sikaplan® WP 1120 -types
- Sikaplan® WP 2101 -types
- Sikaplan® WP 2110 -types
- Sikaplan® WP Protection Sheet-Types
- Sikadur® -31
- Sika® AnchorFix®-2

APPLICATION INFORMATION

Product Data Sheet
Sika® Anchor-300
November 2020, Version 01.01
02072080200000014

BUILDING TRUST



APPLICATION INSTRUCTIONS

SUBSTRATE QUALITY

The substrate conditions are as defined for the waterproofing membrane system which is to be combined with the Sika® Anchor-300.

APPLICATION METHOD / TOOLS

Installation method:

1. Cut out a small section of the waterproofing system or drill through it directly
2. Drill a hole into the substrate
3. Clean the drill hole with high pressure water jet
4. Clean the drill hole with compressed air
5. Inject Sikadur® -31 or Sika® AnchorFix®-2, or use anchor capsule
6. Install Sika® Anchor-300
7. Weld against Sikaplan® PVC membrane
8. Install steel anchor for temporary fixing of rebar cage

LIMITATIONS

- Sika® is not responsible for the permissible anchor forces or the related loading calculations.
- Preliminary pull-out tests are mandatory.
- Installation works must only be carried out by Sika® trained contractors.
- The membrane is not UV stabilized and cannot be installed on structures permanently exposed to sunlight and weathering.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika India Pvt. Ltd.

620, Diamond Harbour Road
Commercial Complex II
Kolkata - 700 034
Tel : +91 33 24472448
Fax : +91 33 23978688
Mail : info.india@in.sika.com



Product Data Sheet

Sika® Anchor-300
November 2020, Version 01.01
020720802000000014

SikaAnchor-300-en-IN-(11-2020)-1-1.pdf